

HIGH PERFORMANCE TIRE CHANGERS

Two heavy-duty tire changers designed to handle the mounting and demounting of low profile and run-flat tires.


Features TC-660 & TC-980MR:

- ◆ Tilting column and pneumatic locking system
- ◆ Bead seating inflation jets are integrated in the clamping jaws insuring quick and safe inflation
- ◆ Twin clamping cylinders provides more power to hold the most difficult rims
- ◆ Conveniently located and powerful bead breaker
- ◆ No scratching. Machine never contacts rim eliminating accidental damage
- ◆ Large diameter hex mount/demount shaft for extra rigidity
- ◆ Pressure limiter, water separator and oiler are standard



TC-660
Large tire / fully automatic / single arm / tilt back

HANDLES TIRES TO 41" DIAMETER AND RIM WIDTHS TO 16". ASSIST ARM FOR CHANGING STIFF LOW-PROFILE TIRES. TILTING COLUMN AND PNEUMATIC LOCKING SYSTEM.

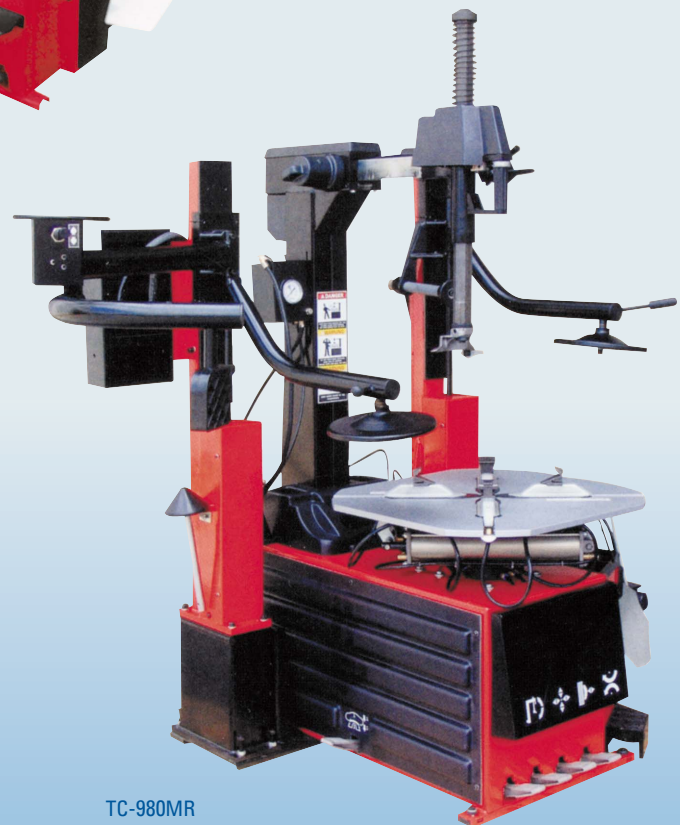

TC-980MR
Large tire / fully automatic / double arm / tilt back

HANDLES TIRES TO 47 1/4" DIAMETER AND RIM WIDTHS TO 15". TWO ASSIST ARMS FOR "HANDS-FREE" CHANGING OF STIFF LOW-PROFILE TIRES.

SPECIFICATIONS	TC-660	TC-980MR
Max wheel diameter	41"	47 1/4"
Max wheel width	3" - 16"	3" - 15"
Rim diameter inside	12" - 23"	15" - 28"
Rim diameter outside	10" - 20"	13" - 24"
Working pressure	8-10 bar	8-10 bar
Power supply	110 vac	110 vac
Bead breaker	2500 kg	2500 kg